


Cooled 10G XMD TOSAs (1625/ 1626):

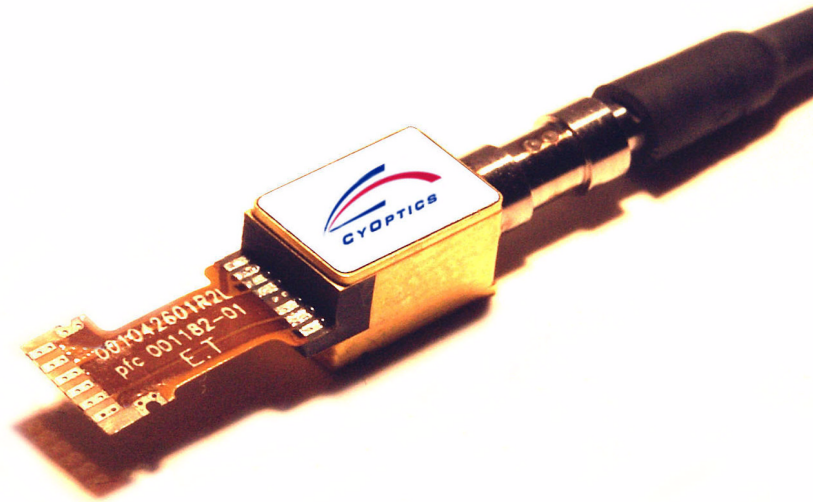

Features & Advantages:

- XMD MSA form factor
- Data Rates to >10.7Gb/s
- High Output Power +2dBm typ. (1626x)
- Ultra-low TEC Power Consumption
- Extended Temp. (90C) version available
- TDM & C-Band DWDM for 100GHz ITU
- Optimal cost structure for XFP XCVR
- LC, SC receptacle and Pigtailed Options
- High Volume, Mature & Fully Qualified

Code	Rate	Reach	Package	Operation Temp.
1625L0xx	10Gb/s	40km	LC receptacle	-5 ~ 80 C
1625L3xx	10Gb/s	40km	LC receptacle	-40 ~ 90 C
1626L0xx	10Gb/s	80km	LC receptacle	-5 ~ 80 C
1626L3xx	10Gb/s	80km	LC receptacle	-40 ~ 90 C
162xS0xx	10Gb/s	40 & 80km	SC receptacle	-5 ~ 80 C
162xF0xx	10Gb/s	40 & 80km	pigtailed, FC connector	-5 ~ 80 C
162xF2xx	10Gb/s	40 & 80km	pigtailed, LC connector	-5 ~ 80 C

For full product datasheets and other information, please email us at:

sales@cyoanalytics.com

