


Cooled 2.5Gb/s DFB & EML (D25xx, E25xx)

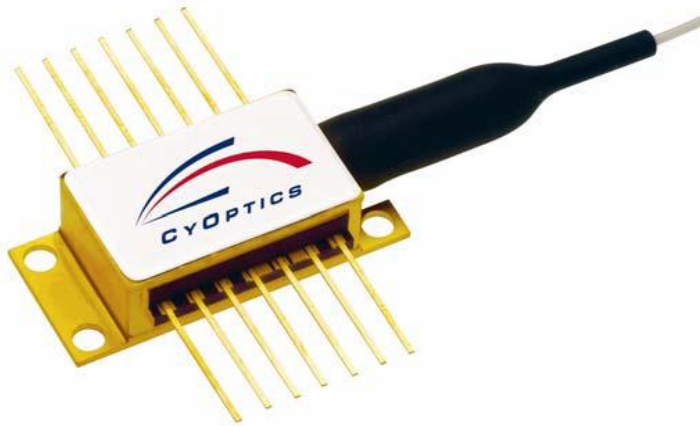

Features & Advantages:

- 2.5G TDM and DWDM (C & L band) applications
- D25xx covers 90~180km, E25xx covers 360~600km applications
- Temperature tunable for precise wavelength selection
- Integrated optical isolator
- Industry-standard, 14-pin butterfly package, high-reliability, hermetic packaging
- Excellent long-term wavelength stability can eliminate the need for external wavelength locker

Code	Rate	Reach	Peak Power	Comments
D2526	2.5 Gb/s	90km	2mW	C & L band
D2555	2.5 Gb/s	150km	2mW	C & L band
D2570	2.5 Gb/s	90km	10mW	C band
D2575	2.5 Gb/s	180km	10mW	C band
E2505	2.5 Gb/s	360km	+1 dBm	C band
E2502	2.5 Gb/s	600km	+1 dBm	C band

For full product datasheets and other information, please email us at:

sales@cyoptics.com

